

# Intellian® v60

## Marine Stabilized Ku-band

3-axis Communication Antenna System with 60cm Reflector Diameter



### ■ Gyro-free satellite search capability

Intellian's new generation Gyro-free satellite search function enables the v60 to acquire and lock onto the satellite without requiring a separate input from the ship's gyro-compass.

### ■ Aptus remote management

The v60 can be accessed, monitored, and controlled from any location in the world. Furthermore, routine maintenance activities can be automated. Aptus helps automate firmware upgrades, tracking parameter adjustment, and systems diagnosis.

### ■ Superior RF performance

Major RF components are designed and manufactured by Intellian's solid in-house engineering to achieve superior antenna gain and xpol isolation recognized among the best performances in the industry.

### ■ Wireless & Networking connectivity

The built in Wi-Fi enables connectivity with Intellian Aptus Mobile for advanced system control and monitoring, including One-Touch satellite library and firmware updates. The new Intellian LAN port on the ACU provides networking connectivity to other Intellian systems enabling integrated monitoring and control of all the Intellian networked devices.

### ■ Save installation and maintenance time

Simple design allows users to install and setup the systems without the need for a skilled engineer. The v60 provides the utmost in reliability resulting in time and cost savings in maintenance.

### ■ Open platform compatibility

The v60 is fully integrated with ABS (Automatic Beam Switching) function with leading service providers who use the embedded OpenAMIP protocol of the iDirect platform and v60 is also compatible with various platforms such as Hughes, Comtech, SatLink and more.

### ■ Wide elevation range

The wide elevation range from  $-10^{\circ}$  to  $100^{\circ}$  enables the v60 to have seamless signal reception while the vessel is traveling near the Equator or Polar Regions.

# Intellian

Connect with the best

# Intellian® v60

## 60cm Ku-band 3-axis Marine Satellite Antenna Systems

### Technical Specifications


Physical	
Radome Height	84.5cm / 33.3"
Radome Diameter	78.0cm / 30.7"
Reflector Diameter	60.0 cm / 23.6"
Weight	59.5kg / 131.2lbs (variable w / RF components)
Stabilized Pedestal Assembly	
Platform	3-axis : Azimuth, Elevation, Cross-level
Azimuth Range	Unlimited
Elevation Range	-10° to 100°
Cross-level Range	±30°
Stabilization Accuracy	0.2° peak mis-pointing @ max ship motion condition
Motor Brake System	Elevation, Cross-level
Reflector & Feed Assembly	
TX Frequency	13.75~14.5GHz Ku-band
TX Gain	38.1dBi @ Mid band
RX Frequency	10.95~12.75GHz Ku-band
RX Gain	35.8dBi @ Mid band
G/T	13.64dB/K (Clear Sky, 30° Elevation)
BUC	4W, 8W, 16W (optional)
LNB	Intellian PLL LNB
Polarization	Cross-pol and Co-pol as standard

Antenna Control Unit	
Dimensions (WxDxH)	43.1cm x 38.1cm x 4.4cm / 17" x 15" x 1.7"
Weight	3.5kg / 7.7lbs
Display	2 line 40 character graphic VFD module
Gyrocompass Interface	NMEA / NMEA 2000
Modem Interface	Ethernet port / RS-232C / I/O ports
Modem Protocol	iDirect, Comtech, SatLink, Hughes, GILAT
Remote Management	Yes
Wi-Fi Operation	Yes
Management Port	Yes
Intellian LAN Port	Yes
Power Requirement	100~240V AC, 50~60 Hz, 4A


### Key Features

- Gyro-free Operation**
  - Without requiring heading device input
  - Quick setup to reduce installation time
- Aptus Web**
  - Built-in web interface
  - Remote firmware upgrade
- Customized Satellite Library**
  - Additional satellite information setting not required for installation
- Automatic Diagnosis**
  - Encoder, Motor, Tilt/Gyro sensor, LNB pol control, LNB, Antenna & ACU power, Modem connection, I/F
- DC Power Separation**
  - Rotary joint - TX and RX IF signal
  - Slip ring - Antenna power and 8W BUC power

### System Dimensions

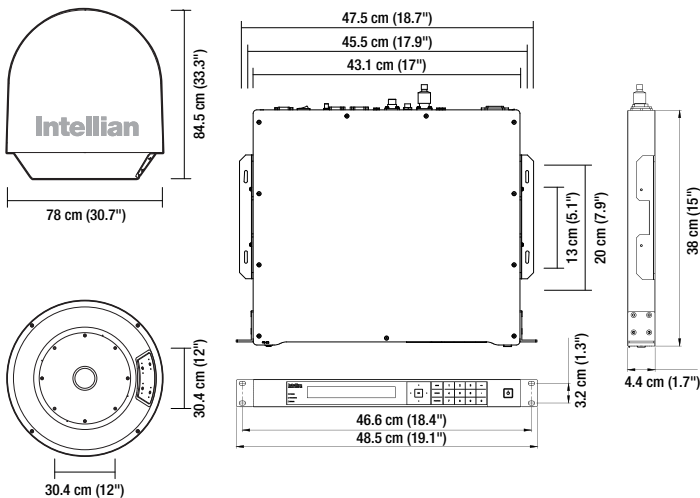

### System Diagram

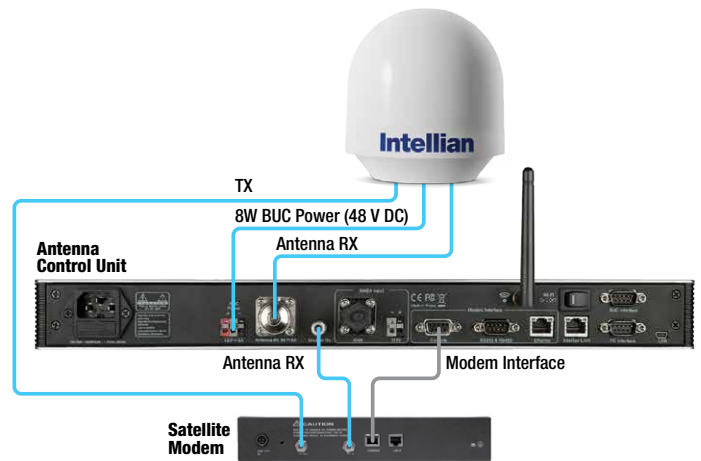

\*Modem is not supplied



**Global HQ**  
Innovation Center / Factory  
Intellian Technologies, Inc  
T +82 31 379 1000  
F +82 31 377 6185

**APAC**  
Seoul Office  
Intellian Technologies, Inc.  
T +82 2 511 2244  
F +82 2 511 2235

**Americas**  
Irvine Office  
Intellian Technologies USA, Inc.  
T +1 949 727 4498  
F +1 949 271 4183  
Toll Free +1 888-201-9223

**EMEA**  
Rotterdam Office  
Intellian B.V.  
T +31 1 0820 8655  
F +31 1 0820 8656